
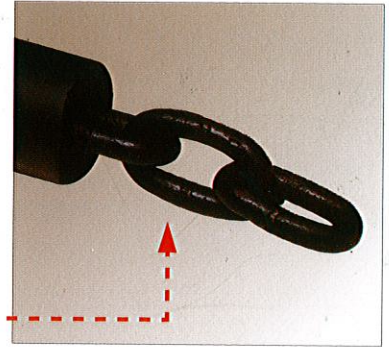


使您的电梯平稳、快捷、舒适。

WFQS 全塑弹性阻燃电梯平衡补偿链

WF-QS full-plastic flex fire-retardant balance compensating chain

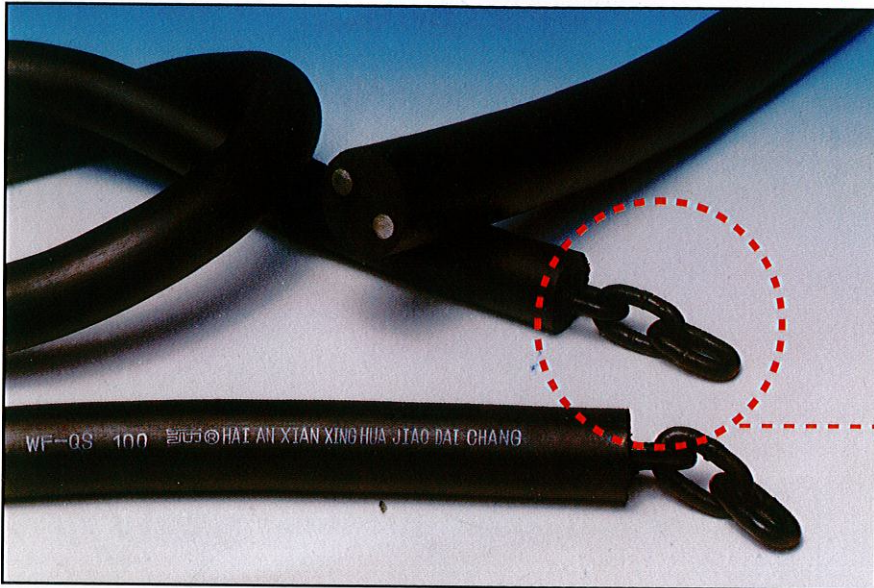

规格参数表: Basic parameter

规格型号 Model No	单位重量 Unit Weight (kg/m)	外径 External Diameter (mm)	最小允许弯曲直径 Allowed least curvation Dia(mm)	破断负荷 Broken load(> KN)
WFQS075	1.12 ± 0.2	24 ± 1.5	560	11.28
WFQS100	1.49 ± 0.2	29 ± 1.5	600	13.32
WFQS150	2.23 ± 0.2	35 ± 1.5	600	23.68
WFQS200	2.98 ± 0.2	38 ± 1.5	650	29.97
WFQS250	3.72 ± 0.2	42 ± 1.5	650	40.80
WFQS300	4.46 ± 0.2	44 ± 1.5	650	46.70
WFQS350	5.21 ± 0.2	49 ± 1.5	680	57.81
WFQS400	5.95 ± 0.2	52 ± 1.5	680	61.00

WFQS全塑弹性阻燃电梯平衡补偿链,是一种性能优异的产品,给电梯提供一种理想的,可平稳运行的平衡补偿产品。产品结构上由电焊锚链、复合材料PVC的完美结合,形成其独特的功能。其优点是弹性好、弯曲半径小、阻燃、耐老化、温度适应范围广,使用后平稳性能好,噪声低,适用于环境温度-15℃至+60℃之间,速度2.5m/s以下的中高速电梯。

WFQS full-plastic flex fire-retardant balance compensating chain, is a kind of product with good function to keep elevator smooth operation .In structure, it is a perfect combination by welding chain and synthetic PVC , and formed special character.

The advantage is of good flexibility ,low noise ,small curvation radius ,fire -retardant ,ageing-resistant ,keep the elevator operating smoothly ,and can be used in the temperature of -15℃-+60℃,the elevator speed lower than 2.5m/s.